

Epico trend 240

T	2
Dimension	small proportion of partial lengths allowe

player	ca. o mm
	HDE OOOka /m3

Sublayer	Emissionclass E1

Veight	7,6 kg/m²
veigni	7,0 kg/m²

Surface	Oil, matt lacquer & various colours
Juliace	Oil, illali lacquei a various colouis

Slip-resistance	lacquer R10, oil R10, oil, brushed R11

Profile	Tongue/groove V4
	0 . 0

nstallation	Full-surface bonding
nstallation	ruii-surrace ponaing

Glueing	PVAc-flue, D3 to DIN EN 204

Underfloorheating Suitable for hot water underfloor heating

nermal resitance	0,0504 m ² K/W
ici iliai i collarice	0,000 4 111 119 11

Fire class	Cfl-S1
FILE CICISS	\ .II=\) I

Certification	PEFC, ISO 14001, eco-Institut, building supervisory approval, CE
---------------	--

Origin wood (oak)	Europe
-------------------	--------

Production	Austria
i i Gadenon	Ausiliu

Cleaning and maintenance	According to STÖCKL cleaning and maintenance instructions
--------------------------	---



GRADING CHARACTERISTICS

style	charakter	Colourline style	Colourline
Calm & elegant grading with low knot content and only small knots	Lively assortment with a modern and rustic look	Calm and elegant grading with low knot content and only small knots	Mixed grading of style and character, reflecting the full range of grading characteristics
Oak is sapwood-free, Nut may contain some sapwood	Natural colour differences in various forms	The surface is colour treated	The surface is colour treated










	EPICO trend 190
Dimension	2100 * 190 * 9,5 mm small proportion of partial lengths allowed
Top layer	ca. 3 mm
Sublayer	HDF 900kg/m³ Emissionclass E1
Weight	7,6 kg/m²
Surface	Oil, matt lacquer, Pure & various colours
Slip-resistance	lacquer R10, oil R10, oil, brushed R11
Profile	Tongue/groove V4
Installation	Nut/Feder V4
Glueing	Full-surface bonding
Underfloorheating	Suitable for hot water underfloor heating
Thermal resitance	0,0504 m² K/W
Fire class	Cfl-S1
Certification	PEFC, ISO 14001, eco-Institut, building supervisory approval, CE
Origin wood (oak)	Europe
Production	Austria
Cleaning and maintenance	According to STÖCKL cleaning and maintenance instructions

GRADING CHARACTERISTICS

style	charakter	Colourline style	Colourline
Calm & elegant grading with low knot content and only small knots	Lively assortment with a modern and rustic look	Calm and elegant assortment with a high proportion of branches and only small knots	Mixed grading of style and character, reflecting the full range of grading characteristics
Oak is sapwood free Nut may contain some sapwood	Natural colour differences in various forms	The surface is colour treated	The surface is colour treated



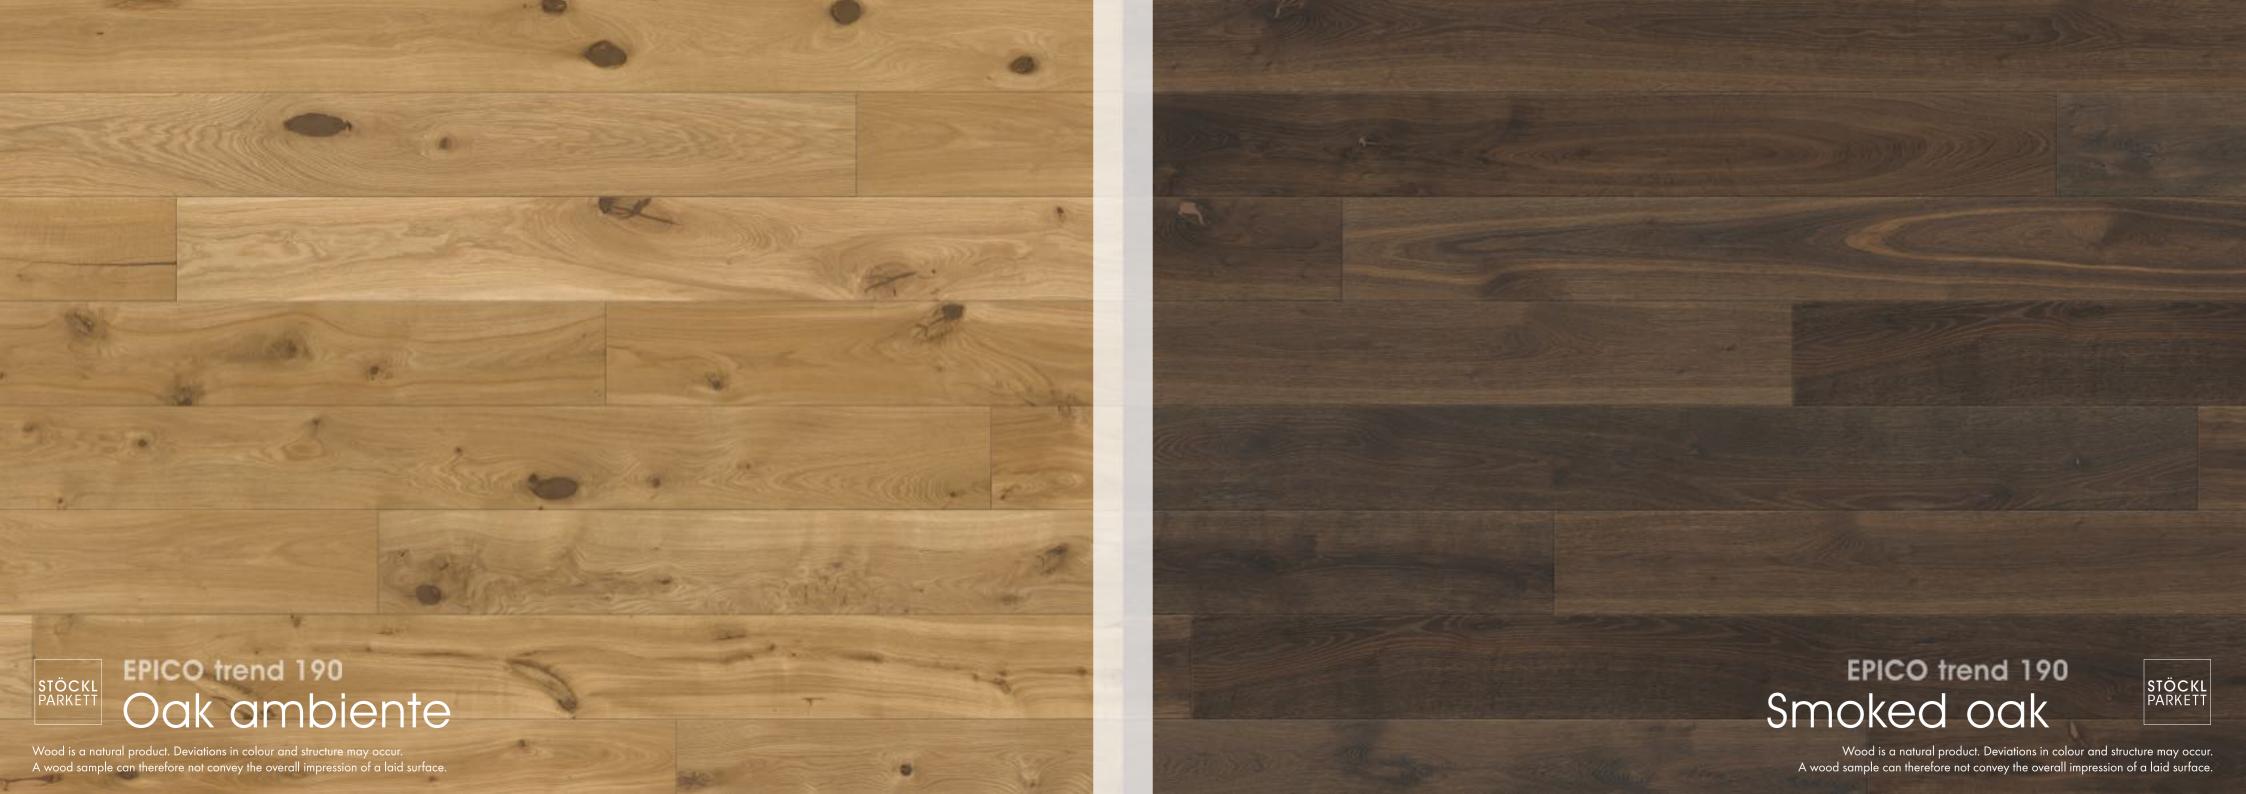

















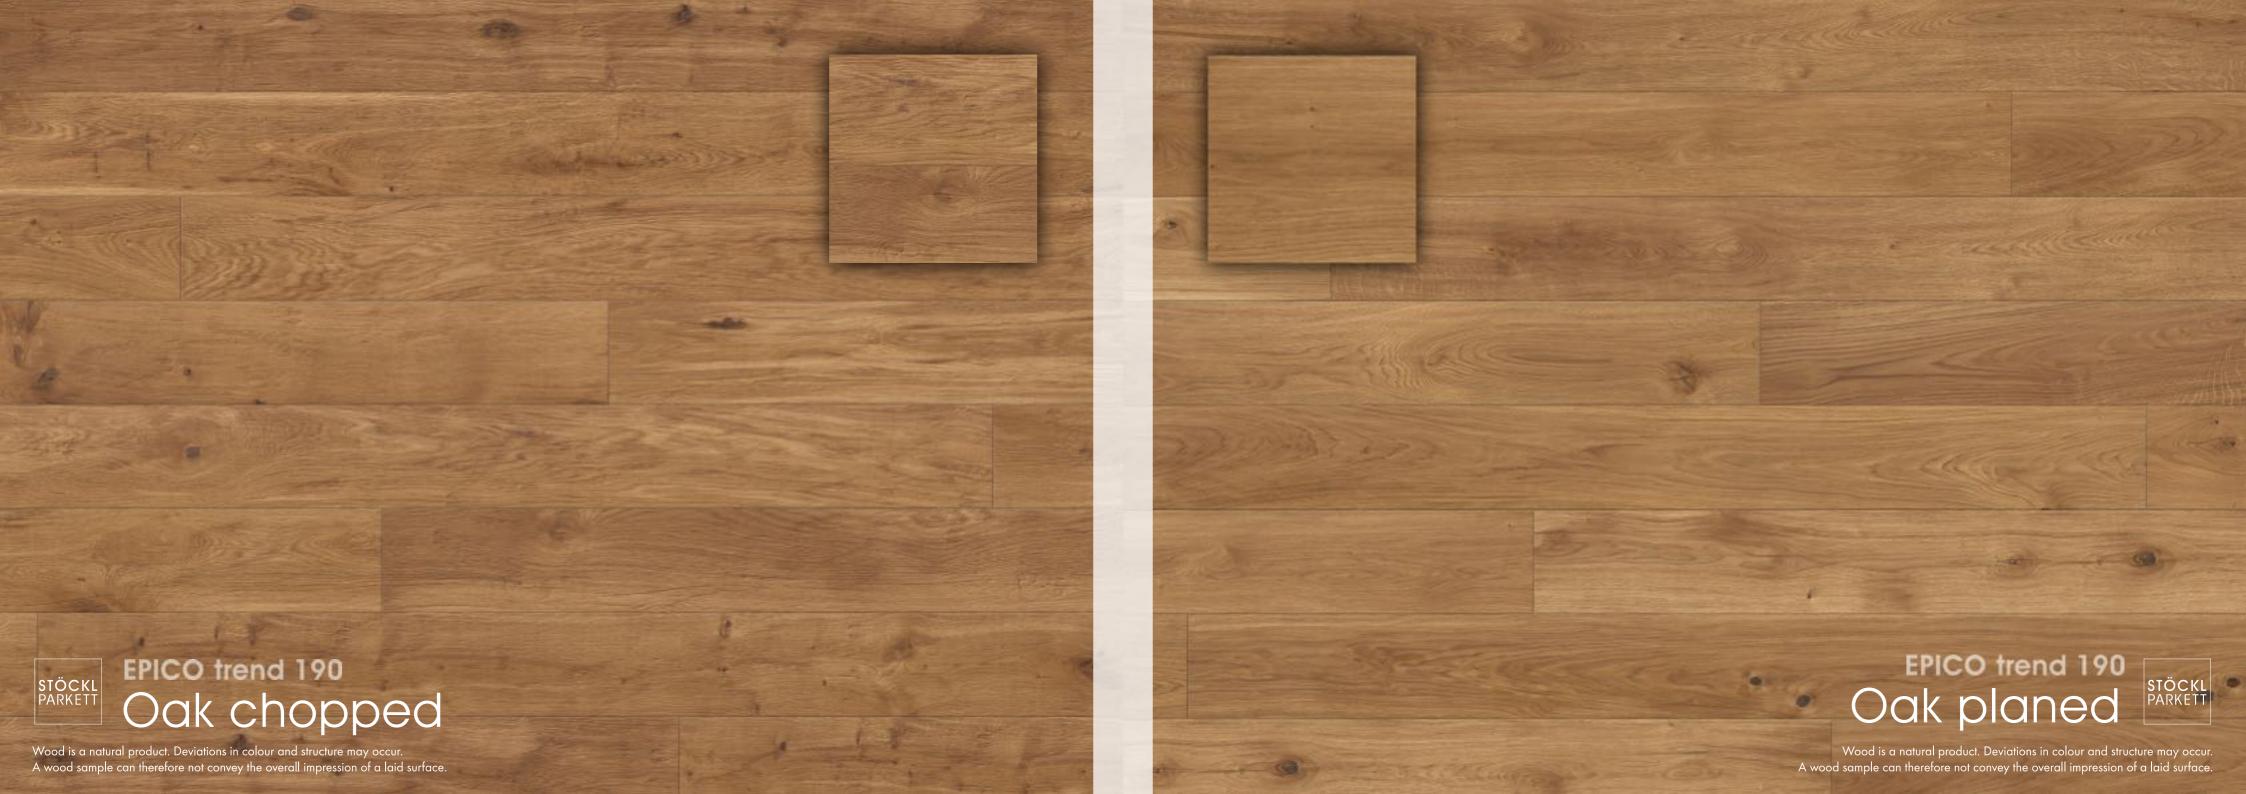

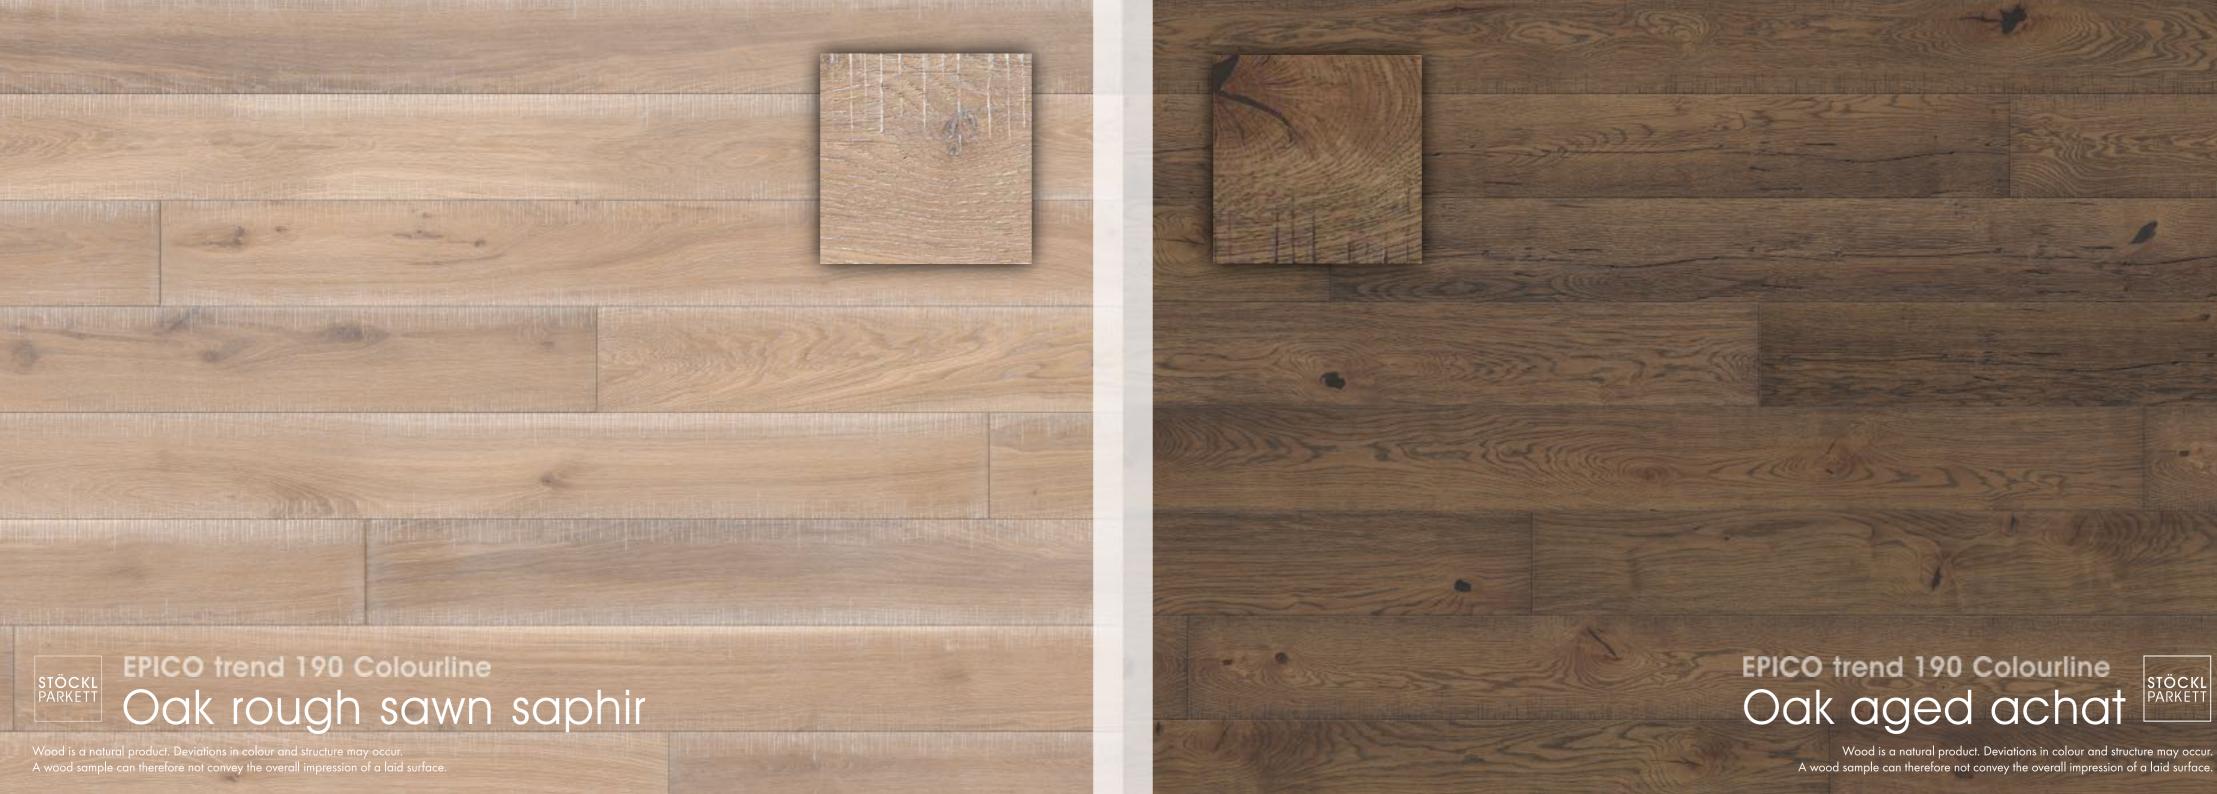



EPICO trend 140


Dimension	1400 * 140 * 9,5 mm small proportion of partial lengths allowed
Top layer	ca. 3 mm
Sublayer	HDF 900kg/m³ Emissionclass E1
Weight	7,6 kg/m²
Surface	Oil, matt lacquer & various colours
Slip-resistance	lacquer R10, oil R10, oil, brushed R11
Profile	Tongue/groove V4
Installation	Nut/Feder V4
Glueing	Full-surface bonding
Underfloorheating	Suitable for hot water underfloor heating
Thermal resitance	0,0504 m² K/W
Fire class	Cfl-S1
Certification	PEFC, ISO 14001, eco-Institut, building supervisory approval, CE
Origin wood (oak)	Europe
Production	Austria
Cleaning and maintenance	According to STÖCKL cleaning and maintenance instructions

SORTIERUNGSMERKMALE

2-Schicht Landhausdiele Epico

style	charakter	Colourline style	Colourline
Calm & elegant grading with low knot content and only small knots	Lively assortment with a modern and rustic look	Calm and elegant assortment with a high proportion of branches and only small knots	Mixed grading of style and character, reflecting the full range of grading characteristics
Oak is sapwood free Nut may contain some sapwood	Natural colour differences in various forms	The surface is colour treated	Die Oberfläche ist farblich bThe surface is colour treatedearbeitet



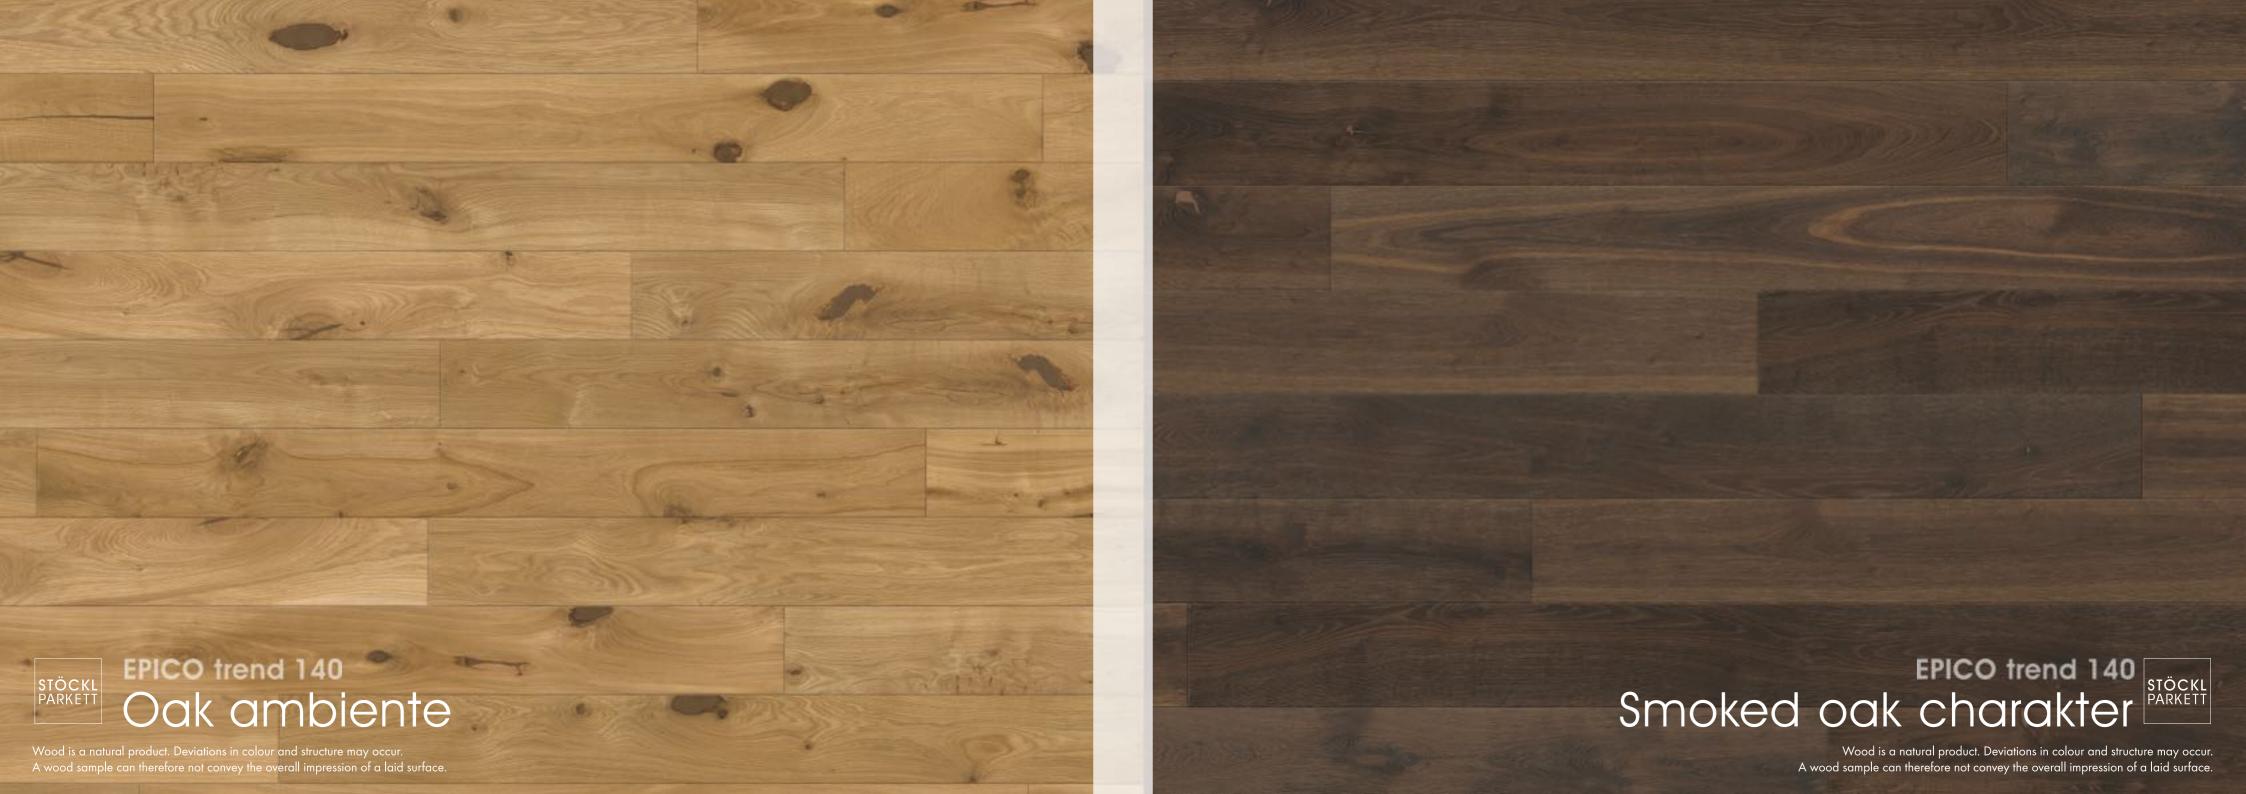





AUSTRIAN PLOOP

EPICO modern 140

Dimension	690 * 140 * 9,5 mm
Top layer	ca. 3 mm
Sublayer	HDF 900kg/m³ Emissionclass E1
Weight	7,6 kg/m²
Surface	Sanded or brushed, oil, matt lacquer, pure & various colours
Slip-resistance	lacquer R10, oil R10, oil, brushed R11
Profile	Tongue/groove V4
Installation	Nut/Feder V4
Glueing	Full-surface bonding
Underfloorheating	Suitable for hot water underfloor heating
Thermal resitance	0,0504 m² K/W
Fire class	Cfl-S1
Certification	PEFC, ISO 14001, eco-Institut, building supervisory approval, CE
Origin wood (oak)	Europe
Production	Austria
Cleaning and maintenance	According to STÖCKL cleaning and maintenance instructions
Reinigung und Pflege	Entsprechend STÖCKL-Pflegeanleitung



